



**Application** for liquids, gases, vapours.

**Pressure/Temperature Rating** for valves with metal-to-metal seat

Nominal sizes DN	[mm] [in]	15–100			125–200		
		1/2–4			5–8		
Nominal pressure	PN	16 <sup>1)</sup>					
Max. service pressure	[barg]	16	14	13	16	14	13
	[psig]	230	200	185	230	200	185
Related temperature	[°C]	120	200	250	120	200	300
	[°F]	248	392	482	248	392	572
Minimum temperature <sup>2)</sup>		–60 °C (–76 °F)			–10 °C (–14 °F)		

<sup>1)</sup> In terms of resistance also rated for ASME 125 and 150.

<sup>2)</sup> Minimum temperature for nominal pressure rating.

**Soft seats**

EPDM (ethylene propylene): –40 to +150 °C (–40 to +302 °F) for water, condensate and steam.  
 FPM (fluoro rubber): –25 to +200 °C (–13 to +392 °F) for oils, gases and air.

But also note valve pressure/temperature rating in the above table.

**Chemical resistance** see GESTRA Information A 2.1.

**Connections** of wafer-type valves<sup>3)</sup>

Standard valves for fitting between flanges to		
DIN	BS	ASME
DIN 2501 (BS 4504) PN 6/10/16	BS 10 tables D, E, F	ASME B 16.1 Class 125 FF ASME B 16.5 Class 150 RF <sup>4)</sup>

<sup>3)</sup> DN 15–100 mm (1/2–4) with universal centering ring.

<sup>4)</sup> ASME class 150 RF only suitable for DN 125–200 mm (5–8").

**Dimensions**


DN	[mm] [in]	15	20	25	32	40	50	65	80	100	125	150	200
		1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8
Dimensions in mm	L <sup>5)</sup>	16	19	22	28	31,5	40	46	50	60	90	106	140
	D	40	47	56	72	82	95	115	132	152	184	209	264
Weight	[kg]	0.1	0.14	0.22	0.5	0.66	1.1	1.45	2.3	3.5	6.8	10	20

<sup>5)</sup> Overall length according to DIN EN 558-1, table 11, series 49 (≙ DIN 3202, part 3, series K4).


**Materials**

DN 15–100 mm (1/2–4")	DIN reference		ASTM equivalent
Body, seat and guide ribs	Brass CuZn 35 Ni	2.0540	
Valve disc, spring retainer	X6CrNiMoTi 17 122	1.4571	A 182 F 316
Spring			A 313 Type 316
Centering ring	X 12 CrNi 177	1.4310	A 313 Type 302
DN 125–200 mm (5–8")			
Body, seat	EN-GJL-250 (GG-25)	EN-JL 1040 (0.6025)	A 126 Class A
Valve cone and spindle	EN-GJS-400-15 (GGG 40)	EN-JS 1030 (0.7040)	A 536 60-40-18
Guide support	UZSt 37-2	1.0161	A 105
Spindle guide	X5CrNi 18 10	1.4301	A 182 F 304
Spring	X6CrNiMoTi 17 122	1.4571	A 313 Type 316

Old DIN designations are stated in brackets.

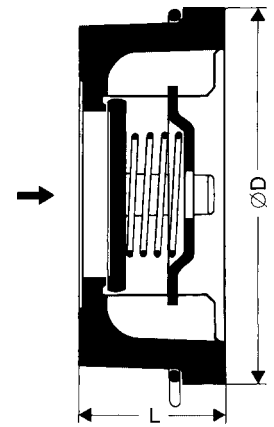

DN 15–100 mm  
(1/2–4")

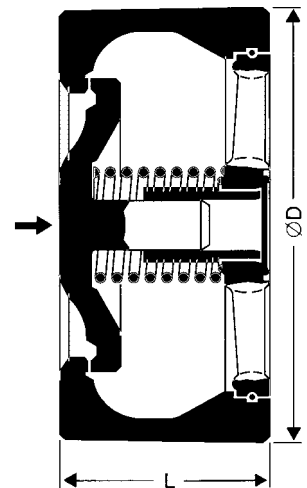

DN 125–200 mm  
(5–8")



These products comply with the requirements of the EC Pressure Equipment Directive (PED) 97/23. DN 100–200 mm with CE marking. DN 15–80 mm are excluded from the scope of this Directive and **not entitled** to bear the CE marking.

# A<sub>2</sub>

**Non-Return Valves**  
PN 6/10/16  
DN 15–200  
(½–8")

RK 41, PN 16



## GESTRA GmbH

P.O. Box 10 54 60, D-28054 Bremen  
Münchener Str. 77, D-28215 Bremen  
Tel. +49 (0) 421 35 03-0, Fax -393  
E-mail gestra.gmbh@gestra.de  
Internet www.gestra.de



Flow Control Division

### Opening Pressures

Differential pressures at zero volume flow

DN		Opening pressures [mbar]			
		Direction of flow			
		without springs	with springs		
[mm]	[in]	↑	↑	→	↓
15	½	2.5	25.0	22.5	20
20	¾	2.5	25.0	22.5	20
25	1	2.5	25.0	22.5	20
32	1¼	3.5	27.0	23.5	20
40	1½	4.0	28.0	24.0	20
50	2	4.5	29.0	24.5	20
65	2½	5.0	30.0	25.0	20
80	3	5.5	31.0	25.5	20
100	4	6.5	33.0	26.5	20
125	5	10.5	31.0	20.5	10
150	6	11.5	33.0	21.5	10
200	8	11.2	32.4	22.2	10

1 mbar = 0.0145 psi = 10 mm w.g. = 0.4 in w.g.

On request at extra charge, special springs for opening pressures:

- between 5 and 1000 mbar for DN 15–50 mm (½–2"),
- between 5 and 700 mbar for DN 65 and 80 mm (2½–3"),
- between 5 and 500 mbar for DN 100–200 mm (4–8").

### Enquiry Specification

GESTRA DISCO non-return valve RK 41  
PN 6/10/16.

Wafer design with extremely short overall length to DIN EN 558-1, table 11, series 49.

Suitable for fitting between flanges to DIN, BS or ASME.

Indications on pressure, nominal size (DN), body material.

Metal-to-metal seat or soft seat (EPDM or FPM).

### Order Specification

Type RK 41, DN...

Metal-to-metal or soft seat (EPDM or FPM).

Fluid, flowrate, pressure and temperature.  
Type of pipe flanges.

### Note

The valves should not be used on compressors or where pulsating flow exists.

For these applications please consult us.

Supply in accordance with our general terms of business.

Technical modifications reserved.

© 1979 GESTRA GmbH · BREMEN · Printed in Germany  
810304-02/801c

### Pressure Drop Chart

The curves given in the chart are valid for water at 20°C. To read the pressure drop for other fluids the equivalent water volume flowrate must be calculated and used in the graph.

The values indicated in the chart are applicable to spring-loaded valves with horizontal flow. With vertical flow insignificant deviations occur only within the range of partial opening.

$$\dot{V}_w = \dot{V} \cdot \sqrt{\frac{\rho}{1000}}$$

$\dot{V}_w$  = Equivalent water volume flow in [l/s] etc.

$\rho$  = Density of fluid (operating condition) in [kg/m³] etc.

$\dot{V}$  = Volume of fluid (operating condition) in [l/s] etc.

When selecting valve please consider:

Partial opening  
= instable range

Full opening  
= stable range

